
TROY VLD

Very Light Duty Water Delivery
Gırtlak - Lavabo Sifon

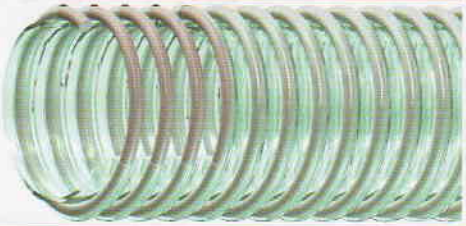

CONSTRUCTION : STRONG, FLEXIBLE, AND SMOOTH PLASTICIZED PVC.
SHOCK RESISTANT PVC SPIRAL.
CRUSHING, CHEMICAL AGENTS, ABRASION AND WEATHER RESISTANT, CORRUGATED OUTSIDE.

APPLICATION : FOR LIGHT DUTY SUCTION AND DELIVERY OF WATER, LIGHT CHEMICALS, IN AGRICULTURAL, INDUSTRIAL APPLICATIONS, CONSTRUCTIONS AND SANITARY USES.

KONSTRUKTION : STABILER, HOCHFLEXIBLER, GLATTER, PLASTIFIZIERTER PVC.
MIT VERSTÄRKUNGSSPIRALE AUS SCHLAG-UND DRUCKFESTEM PVC.
ÄUSSERST STRAPAZIERFÄHIG UND BIEGSAM, DRUCK- UND ABRIEBFEST, UV-UND WITTERUNGSBESTÄNDIG GERIPPTE AUSSENFLÄCHE

ANWENDUNG : FÜR BE-UND ENTLADEN VON WASSER.

COSTRUZIONE : TUBO LISCIO, LEGGERO E FLESSIBILE IN PVC PLASTIFICATO.
SPIRALE DI RINFORZO IN PVC RIGIDO ANTI URTO E ANTISCHIACCIAMENTO.
ESTERNA ONDULATA RESISTENTE A CARICHI, ABRASIONE E AGENTI ATMOSFERICI ED A MOLTI PRODOTTI CHIMICI.

IMPIEGO : PER IRRIGAZIONE, ASPIRAZIONE E MANDATA DI ACQUE, VARI PRODOTTI CHIMICI LEGGERI, LIQUIDI A USO DOMESTICO, EDILIZIA, INDUSTRIA ETC.

KONSTRUKSİYON : ÇOK KUVVETLİ VE ESNEK DÜZ, PVC İÇ YÜZEY.
ŞOKA DAYANIKLI SERT PVC SPİRAL TAKVİYE.
KIRILMAYA, AŞINMAYA, BİR ÇOK KİMYASALLARA VE HER TÜRLÜ HAVA ŞARTLARINA DAYANIKLI BOĞUMLU ÜST YÜZEY.

KULLANIM YERİ : TARIMDA, SANAYİDE, İNŞAATLARDA, EVLERDE LAVOBO SİFON ALTLARINDA, HER TÜRLÜ SU, DETERJAN, HAFİF KİMYASALLAR, EMME VE BASMA İŞLERİNDE.

ID/İÇ		BP/PB	W/A	L/B
inch	mm	BAR	gr/mt	mt
5/8"	16	9	120	30/50
3/4"	19	6	140	30/50
3/4"	19	9	180	30/50
1"	25	6	180	30/50
1"	25	9	220	30/50
1 1/7"	29	6	200	30/50
1 1/4"	32	5	220	30/50
1 1/4"	32	8	360	30/50
1 1/2"	38	5	260	30/50
1 1/2"	38	8	440	30/50
2"	51	4	400	30
2"	51	7	730	30
3"	76	6	1000	30

-5°C / +60°C

OTHER COLOURS AND DIAMETERES AVAILABLE UPON REQUEST.
İSTEK ÜZERİNE FARKLI RENKLERDE VE ÖLÇÜLERDE ÜRETİLİR.

NORMS NORMEN NORME NORMLAR	ISO 1307	MARKING BESCHRIFTUNG MARCATURA MARKALAMA	SEL TROY VLD	COLOUR FARBEN COLORI RENKLER	